

D-Sub-Connector High-density Dip Solder straight

Technical data :

Material and finish :

Shell: steel, tin plating or nickel plating

Insulator: Thermoplastic polyester
self-extinguishing rated 94V-0

Contact: Cooper alloy

Contact surface: gold plated over nickel

Operating Temperature: -55°C to +105°C


Electrical data :

Current rating : 5A

Contact resistance: 30Mohm Max. at DC 100Ma







Insulator resistance: 1000Mohm Min. at DC 500V

Voltage: AC 1000V for 1minute







MALE

FEMALE

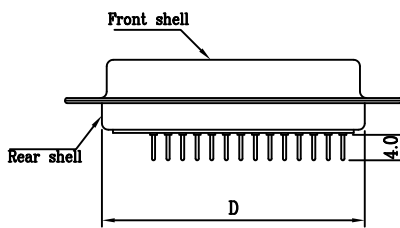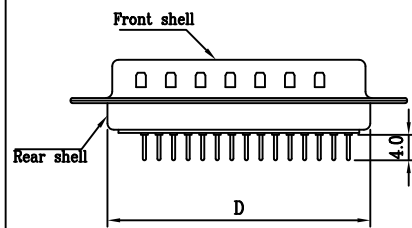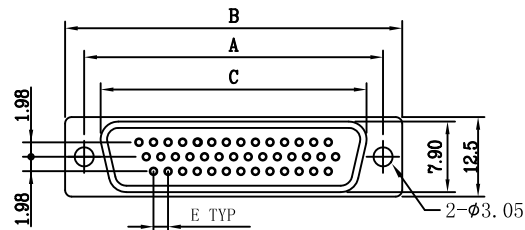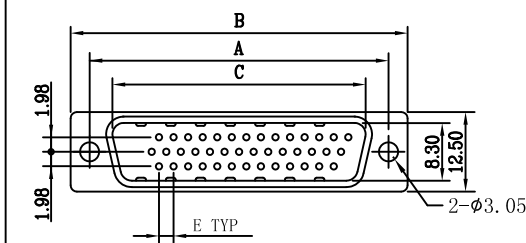

78 POSITION MALE

78 POSITION FEMALE

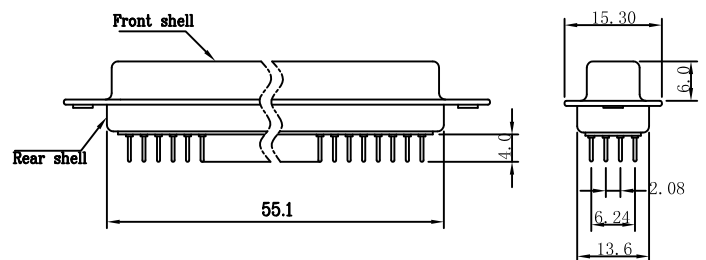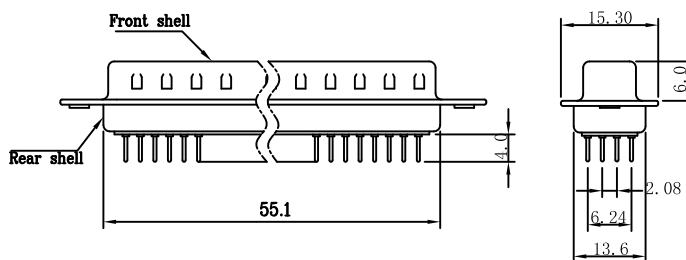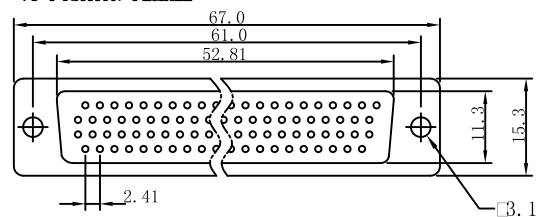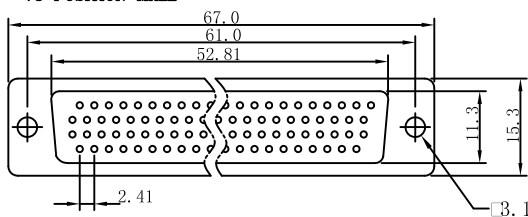

W.E.