



D-Sub-Connector High-density Dip Solder straight


15 POSITION FEMALE

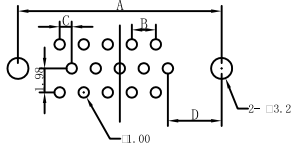


15 POSITION MALE

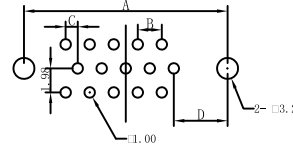


26,44,62 POSITION MALE

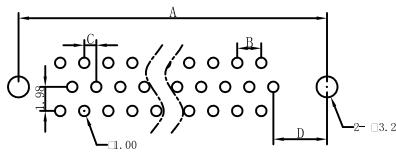

26,44,62 POSITION FEMALE

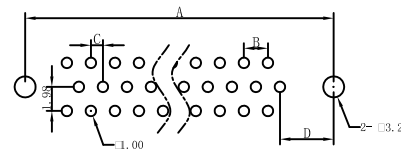


78 POSITION FEMALE/MALE

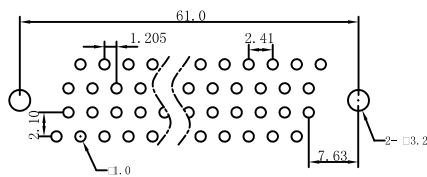

Position	A	B	C	D
15M/F	25.0	2.29	1.145	7.04
26M/F	33.3	2.29	1.145	6.88
44M/F	47.1	2.29	1.145	6.88
62M/F	63.5	2.41	1.205	7.00

How to order



Nr.of contact	Code
15	15
26	26
44	44
62	62

Terminal Type	Code
Plug	1
Socket	2

Mounting method	Code
4#40 Thread rivet W/Boardlock	10
Non rivet,Fixed screws W/Boardlock	20
Non thread rivet	30
4#40 Thread rivet only	31
4#40 Thread rivet W/L bracket	40
Non rivet,Fixed screws W/L Bracket	50
4#40 Thread rivet W/4-prong boardlock	60
M3 Thread rivet W/ bracket	70
M3 Thread rivet W/L Boardlock	80
M3 Thread rivet W/4-prong boardlock	90

Plating Option	Code
Full gold Flash plating	10
Selective gold flash plating	60
5u" selective gold plating	05
15u" selective gold plating	15
30u" selective gold plating	30

Dimensions(Male version)			
	A	B	C
15	16.92	24.99	30.81
26	25.25	33.32	39.14
44	38.96	47.04	53.04
62	55.42	63.50	69.32

Dimensions(Female version)			
	A	B	C
15	16.92	24.99	30.81
26	25.25	33.32	39.14
44	38.96	47.04	53.04
62	55.42	63.50	69.32

Hexagonal bolt Option	Code
Loose HEX.Screws 4.8x11.8	10
Fixed HEX.Screws 4.8x11.8	20
Loose HEX.Screws 4.8x11.8	30
Fixed HEX.Screws 5.8x12.0	40
NON-Accessories	50

W.E.