

157,159

Economy Female-Headers-2.54mm pitch Height 8.5 mm With Polarization Bump

Technical Data :

Insulator Material: High Temperature Thermoplastic,UL 94V-0

Contact : Brass

Plating: Au or Sn over Nickel

Current Rating : 3 Amp

Contact resistance: 20 milliohms Max.

Insulator resistance : 1000 Megohms min.

Dielectric withstanding : AC 500V for 1 Minute.

Operating Temperature: -40°C to +105°C.


Max. processing Temp: 230°C for 30-60 seconds.
260°C for 10 seconds.

Mates with : Pitch 2.54mm, □0.635mm male header




RoHS Compliant


157 Serie

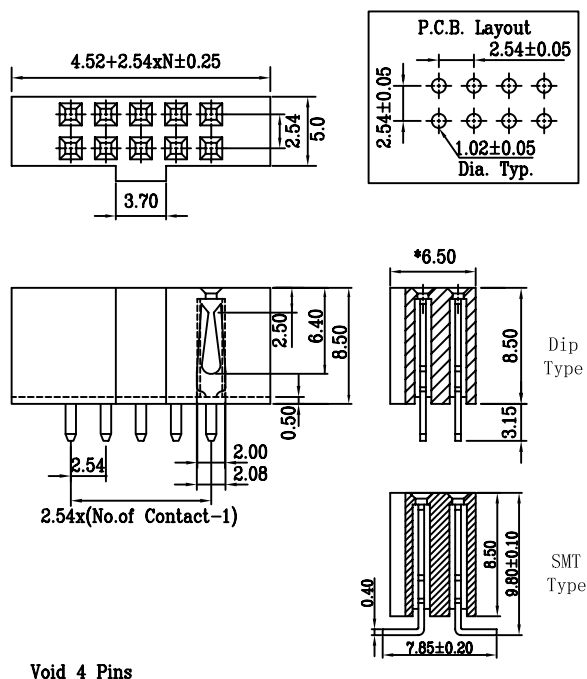

159 Serie

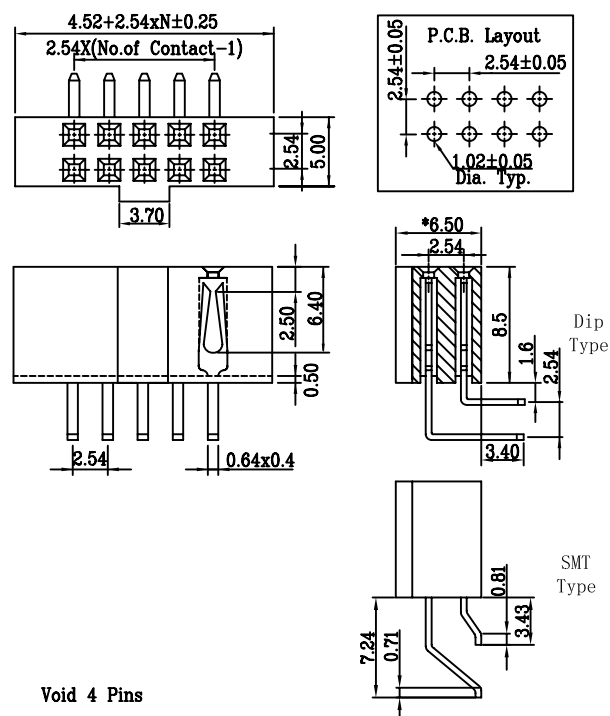

How to order

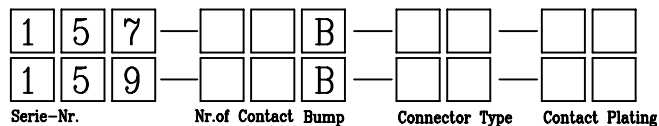

Number of contact	Code
06,08,10,14,16,20,24,26	06B~64B
30,34,40,44,48,50,60,64	

Connector Type	Code
Dip Type	10
SMT Type	20

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10U" Selective gold plated	610
20U" Selective gold plated	620
30U" Selective gold plated	630

W.E.