

# 611-1



## Box Header 1.27x1.27mm Board to Board SMT Type

### Technical Data :


Insulator Material: High Temperature Thermoplastic, UL 94V-0.  
 Contact : 0.40x0.40mm  
 Contact Material: copper alloy  
 Plating: Au or Sn over Nickel  
 Current Rating : 1 Amp  
 Insulator resistance : 500 Megohms min  
 Dielectric withstanding : AC 500V for 1 Minute  
 Operating Temperature: -40°C to +105°C.  
 Max. processing Temp: 230°C for 30-60 seconds.  
 260°C for 10 seconds.

Mates with : 605,606

### RoHS Compliant

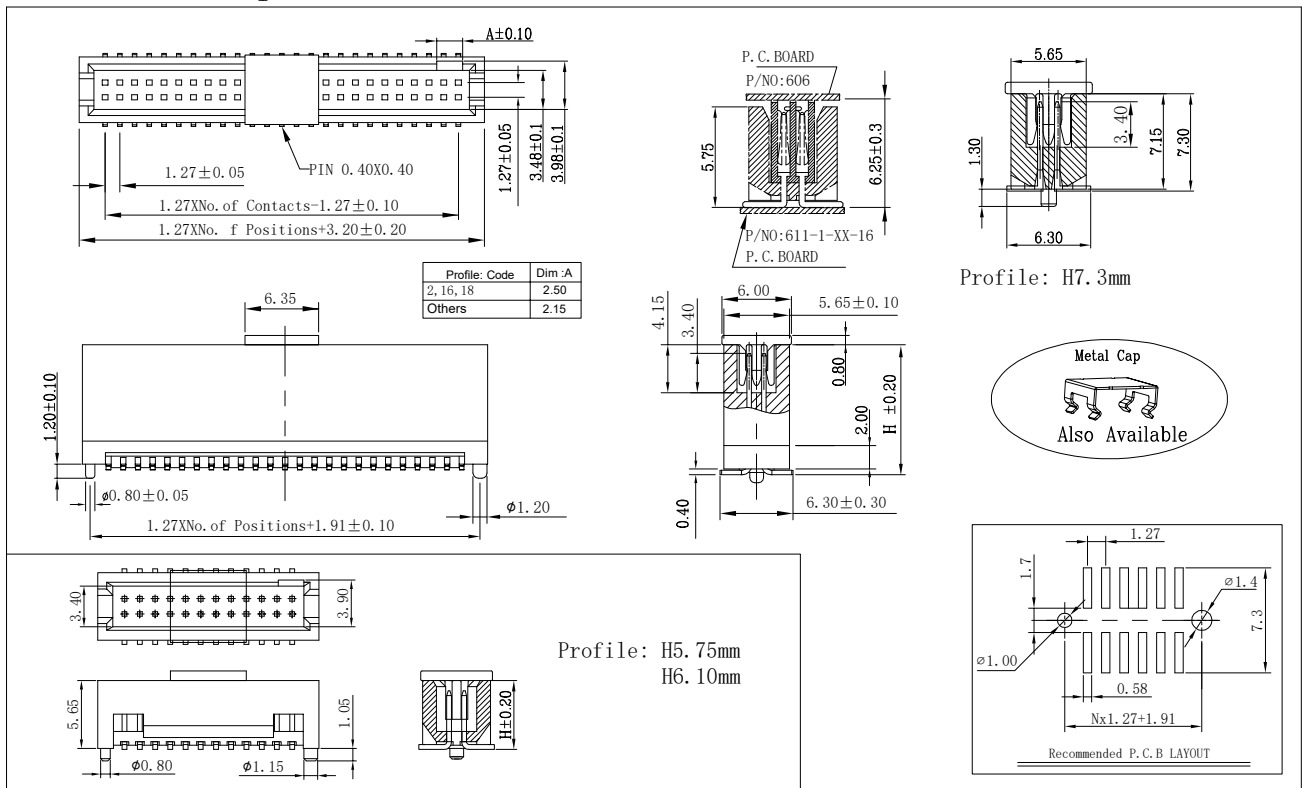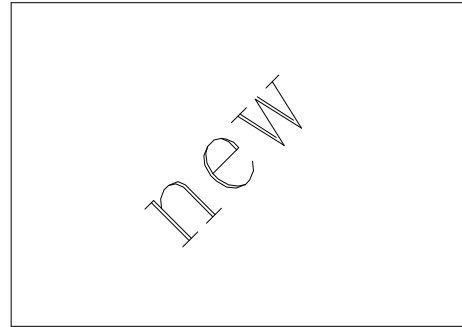

### How to order



Nr. of Contact	Code
010-100	010-100

Profile: H	Code	Available Size	Profile: H	Code	Available Size
7.3	2	10,16,20,30,40,50,68P	14.6	11	10,16,20,26,36,60P
9.5	3	10,16,20,30,34,40,50,70P	15.7	12	20,50,60P
9.9	4	10P	16.1	13	12,20,22,30,56P
10.1	5	16,20,26,30,50P	5.75	16	10-100P
11.2	6	50P	10.9	17	10,26P
11.5	7	10,30,44,50,60,80,100P	6.10	18	10-100P
11.7	8	16,20P	17.8	19	10,16,20,26,40,50,56,68P
12.0	9	32,60P	18.9	21	60P
12.7	10	10,14,20,30,36,50P	13.5	22	30,70,80,100P

Other Pins please contact factory

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.