


605

Female Header 1.27mm Pitch straight For square pin







Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.
Mates with :	Pitch 1.27mm, □ 0.4mm male header



RoHS Compliant

Profile 3.40 mm

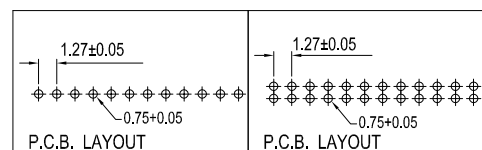

How to order

6	0	5	—	□	□	□	—	□	—	□	□	—	□	□								
Serie-Nr.				Nr.of Contact.				No. of Row				Profile				Connector type				Plating		

Number of contact	Code
Single Row Max. 36	03-36
Double Row Max. 80	06-80

Number of Row	Code
Single Row	1
Double Row	2

Profile	Code
3,4mm 180°	1

Connector Type	Code
For Square pin	20

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10 u" Selective gold plated	610
15 u" Selective gold plated	615
20 u" Selective gold plated	620
30 u" Selective gold plated	630

W.E.