

609B


Pin-Header-Strips-Double row for Surface Mount Technic and High-Temperature Body 1.27mm pitch

Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0.
 Contact : 0.40x0.40mm
 Contact Material: copper alloy
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Insulator resistance : 500 Megohms min
 Dielectric withstanding : AC 500V for 1 Minute
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.

Mates with : S,C Type mates with 605,606,&134.
 J,K Type mates with 134

RoHS Compliant

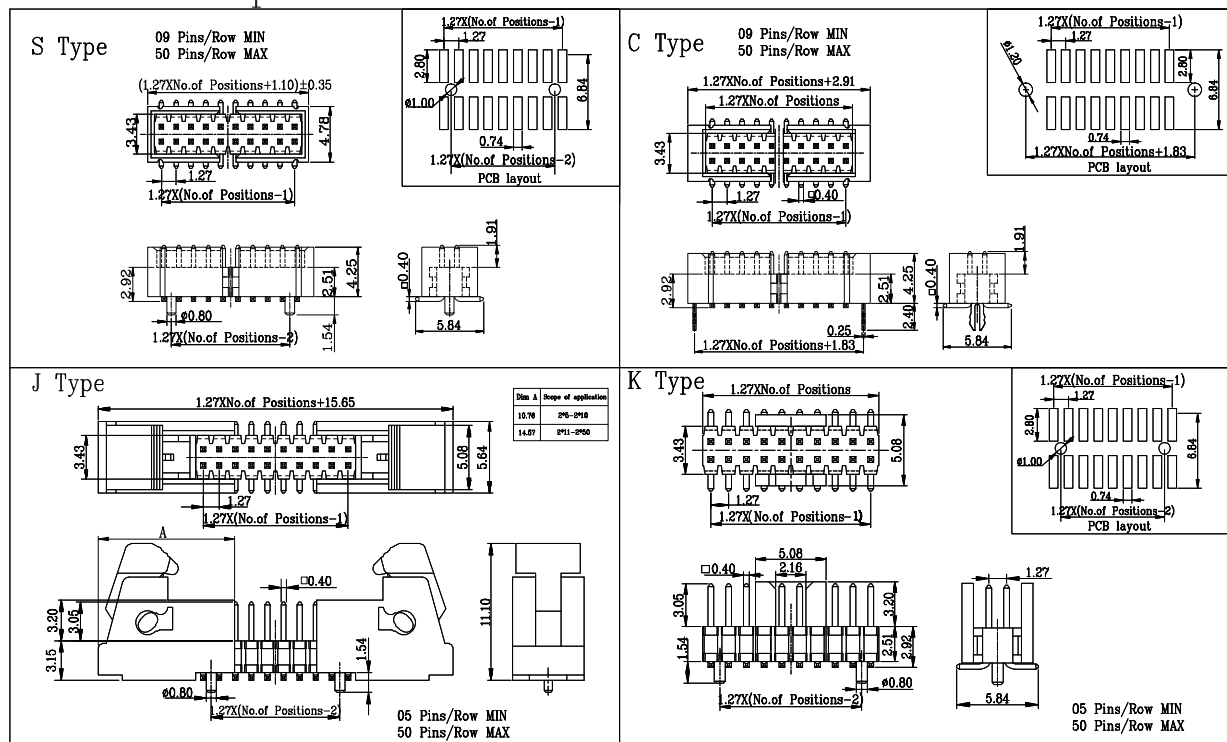

How to order

6 0 9 B — — — — —
 Serie-Nr. Nr. of Contact. Connector Type Plating cap option Packing Location Peg

Nr. of Contact	Code
Double Row Max. 100 contacts	010-100

Connector Type	Code
S Type	1
J Type	2
C Type	3
K Type	4

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / 0 Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Location Peg	Code
W/ Locatoin Peg	10
W/O Locatoin Peg	00

* Dip solder Type are Available

W.E.

WEITRONIC ENTERPRISE CO.,LTD. Web.site:www.weitronictw.com.tw E-mail:info@weitronictw.com.tw