

SPECIFICATIONS:

Electrical characteristics:

- Dielectric withstanding voltage:
AC 1000V r.m.s
- Insulation Resistance:
5000 Megohms Minimum.
- Contact Resistance:
30 Milohms Maximum:
- Operating Temperature:
-55° cTo +125 °c

Mechanical Characteristics:

- Contact insertion Force:
4.5Kg Maximum.
- Contact separator Force:
0.3Kg Minimum.

Materials:


- Insulator: PBT UL 94V-0 Rated
- Shell: STEEL

Finish:


- shell: tin plating or nickel plating

D-SUB P.C.B. STRAIGHT TYPE 1W1P(COAXIAL/POWER)

MALE

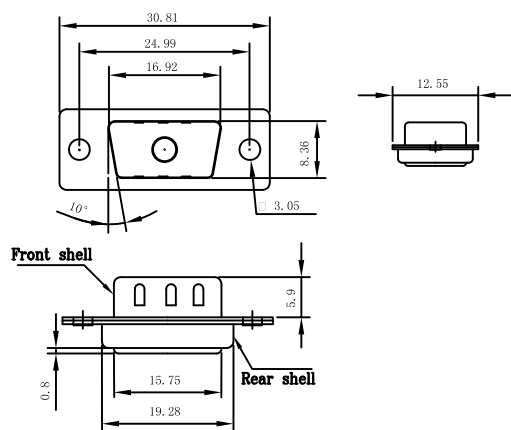


FEMALE

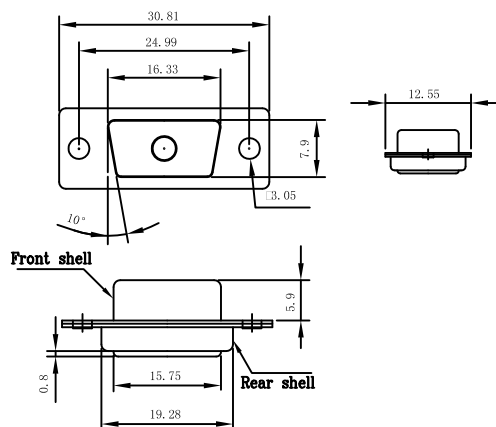

D-SUB P.C.B. STRAIGHT TYPE 2W2P(COAXIAL/POWER)

MALE

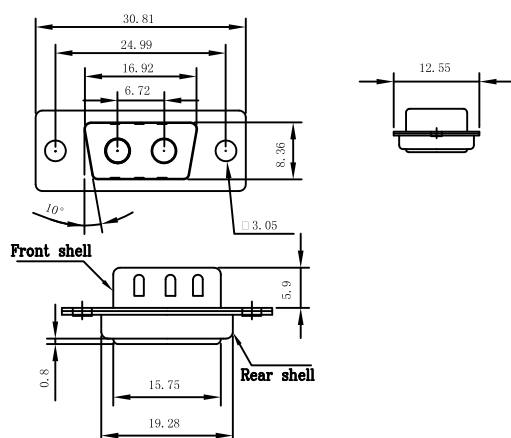

FEMALE

