


143PF-N, 144PF-N

Pin-Header-Press-Fit-Single/Double row-2.54mm Pitch




Technical Data :

Insulator Material: High Temperature Thermoplastic, PA6T, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 3Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -40°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : 157,158,159,160,162,342,623,624,625
 Push in PCB force: 150N Max per pin
 Push out PCB force: 20N Min per pin




RoHS Compliant



143PF-N

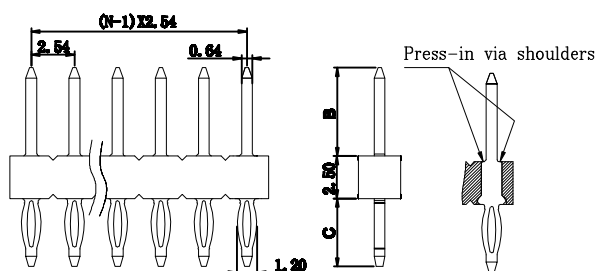

144PF-N

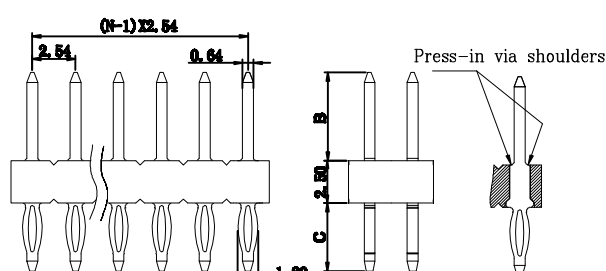

How to order

1 4 3 P F — N — — — — —
 1 4 4 P F — N — — — — —
 Serie-Nr. Terminal code Nr. of contact Plating option

Terminal code	Dimensions(mm)		Terminal code	Dimensions(mm)	
	B	C		B	C
10A	5.2	4.0	10B	5.2	6.5
12A	5.5	4.0	13B	6.8	6.5
13A	6.8	4.0	14B	8.0	6.5
14A	8.0	4.0			
XXX/XXX	As other request B/C, please contact factory				

Number of contact	Code
143PF-N 01~40pins	01~40
144PF-N 02~80pins	02~80

Plating option	Code
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.