


# 611-2

## Pin Header 1.27mm x1.27mm Board Spacer Box Type

### Technical Data :


Insulator Material: High Temperature Thermoplastic,UL 94V-0.  
 Contact : 0.40x0.40mm  
 Contact Material: copper alloy  
 Plating: Au or Sn over Nickel  
 Current Rating : 1 Amp  
 Insulator resistance : 500 Megohms min  
 Dielectric withstanding : AC 500V for 1 Minute  
 Operating Temperature: -40°C to +105°C.  
 Max. processing Temp: 230°C for 30-60 seconds.  
 260°C for 10 seconds.

Mates with : 134 ,IDC Socket




### RoHS Compliant


#### Profile 5.4mm Straight Type

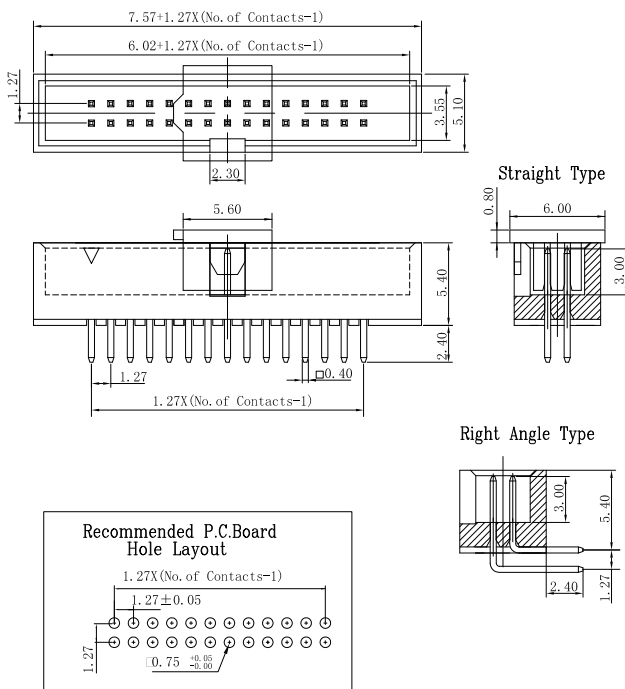

#### Profile 5.4mm SMT Type

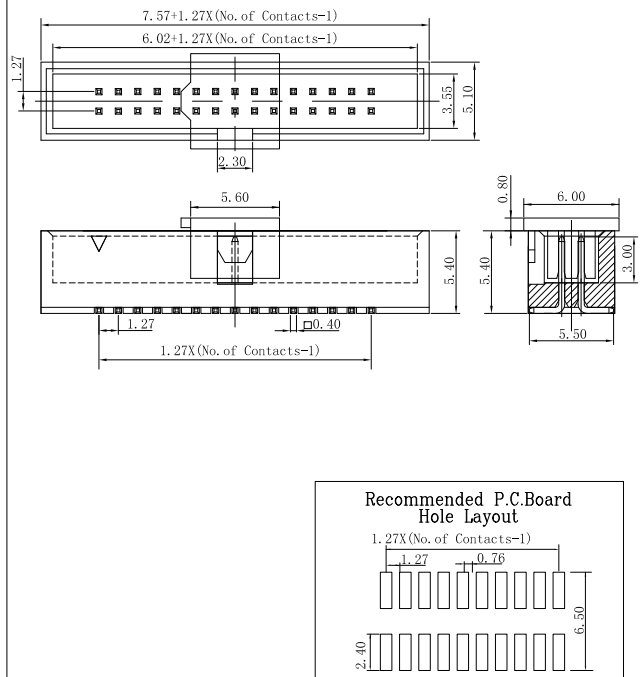

### How to order



Nr. of Contact	Code
010-100	010-100

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place Cap	Code
W/ Cap	1
W/O Cap	2

Packing Option	Code
Tube	1
Tape & Reel	2

Connector Type	Code
Right Angle Type	1
Straight Type	2
SMT Type	3

W.E.