

862


0.8mm Pitch Female Header Double Row SMT Type

Technical Data :


Insulator Material: High Temperature Thermoplastic, UL 94V-0.
Contact Material: copper alloy
Plating: Au or Sn over Nickel
Current Rating : 0.5 Amp
Insulator resistance : 1000 Megohms min
Dielectric withstanding : AC 300V for 1 Minute
Operating Temperature: -40°C to +105°C.
Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.

Mates with : 861

RoHS Compliant

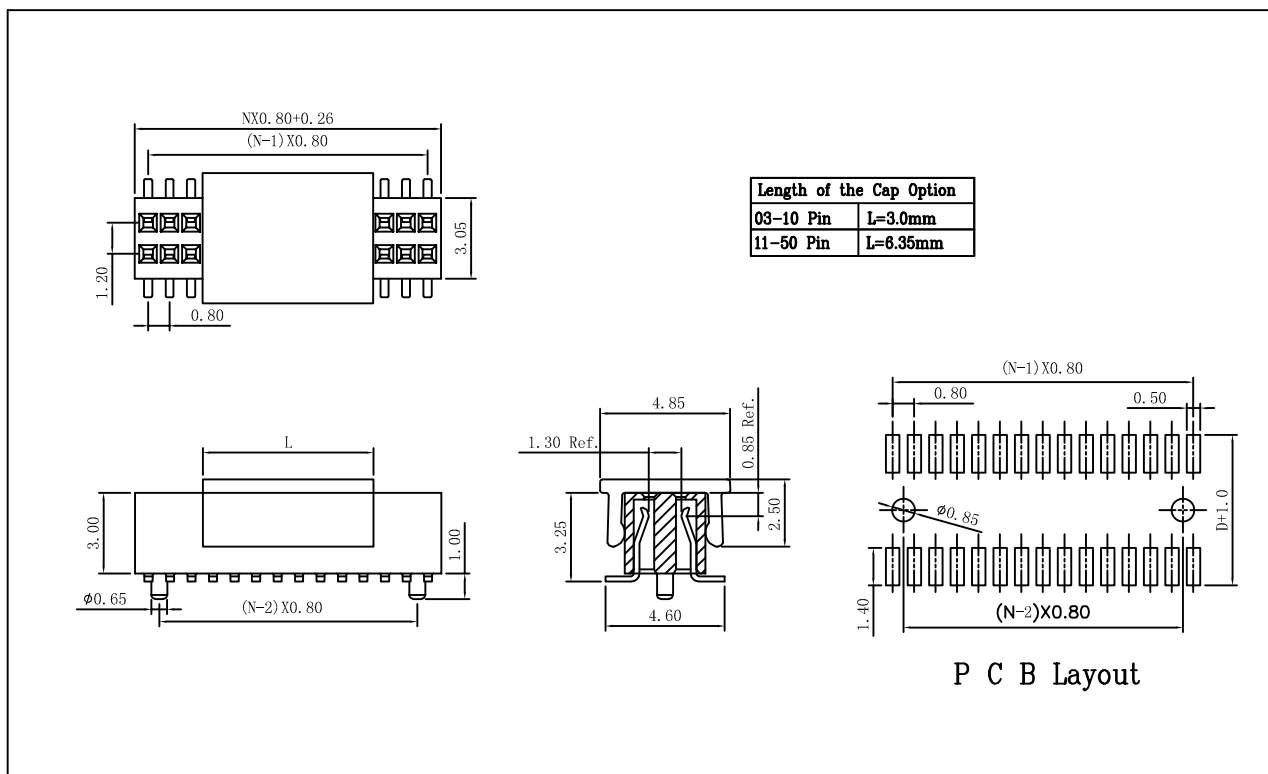

How to order



Number of contact	Code
08~100 Pin	08~100

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
30u"Selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Location Peg Option	Code	Note
W/ Location Peg	10	Pin ≥ 8
W/O Location Peg	00	

Packing option	Code
Tube	1
Tape & Reel	2

W.E.