

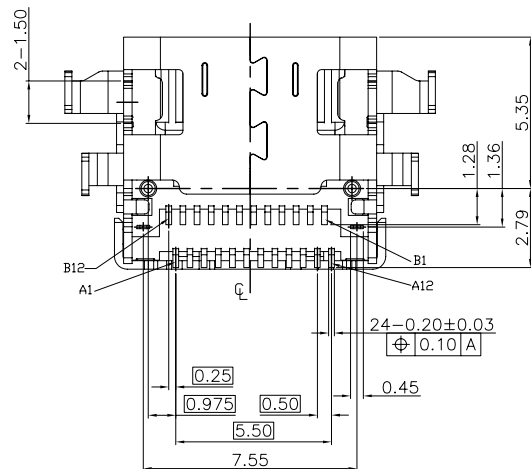
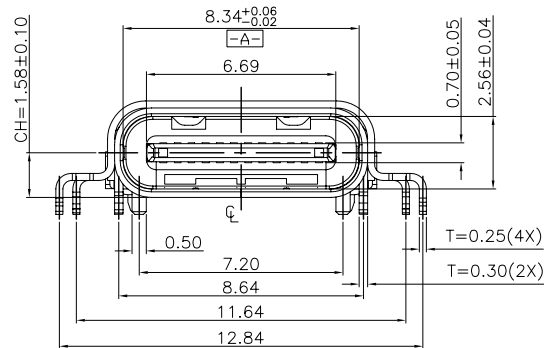
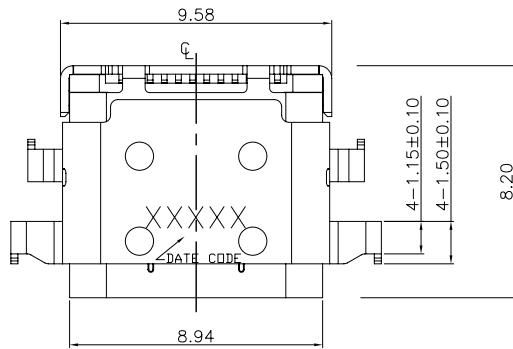


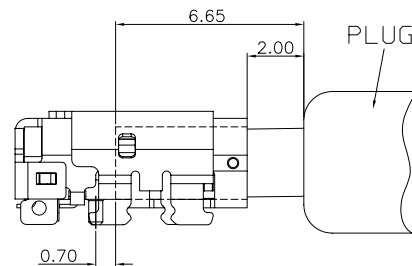

PIN ASSIGNMENT											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1-	TX1-	VBUS	CC1	D+	D-	RFU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	RFU2	D+	D-	CC2	VBUS	TX2-	TX2-	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

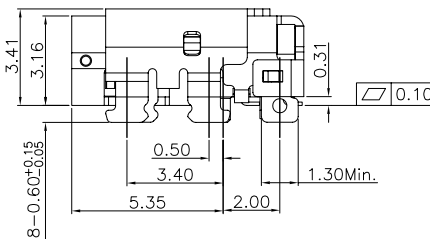

MATING CONDITION

NOTES :

1. MATERIAL:


- A. HOUSING : THERMOPLASTIC, HIGH TEMP, UL94V-0 .
- B. CONTACT : COPPER ALLOY.
- C. MID-PLATE : STAINLESS STEEL.
- D. EMC PAD : STAINLESS STEEL.
- E. SHELL : STAINLESS STEEL.
- F. OUTER SHELL : STAINLESS STEEL.

2. FINISH:


- 2.1 CONTACT : Au 30u" ON CONTACT AREA
80u"(Min) NICKEL UNDERPLATING OVERALL .
- 2.2 OUTER SHELL : GOLD FLASH ON SOLDER AREA .

3. PART NUMBER : YMU079XXXX

30=CONTACT AREA GOLD PLATED 30u"
15=CONTACT AREA GOLD PLATED 15u"
03=CONTACT AREA GOLD PLATED 3u"



DETAIL A

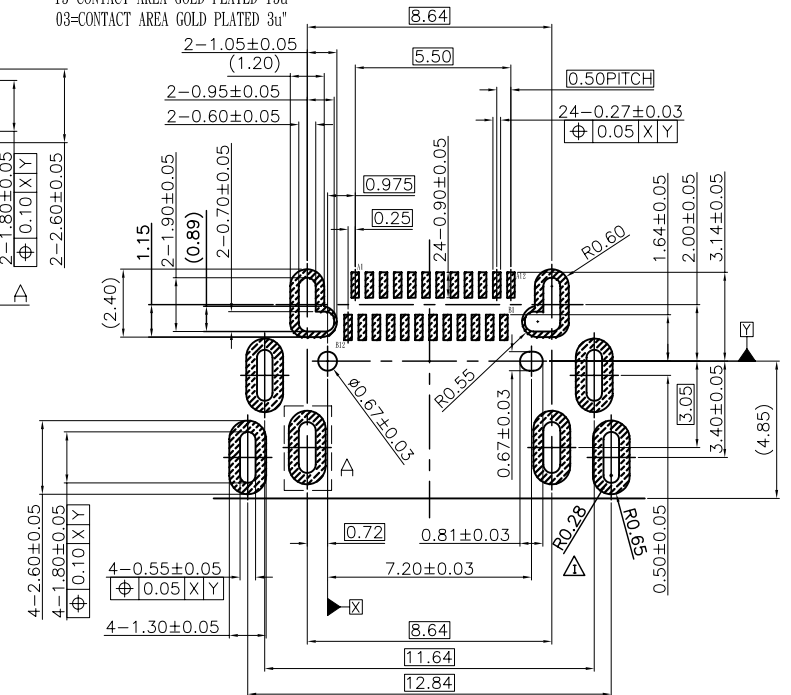

RECOMMENDED PCB LAYOUT (TOP VIEW)

PCB THICKNESS 0.80±0.05mm

一般公差 TOLERANCES ANGLES ± 1° X. ± 0.50 . X ± 0.25 . XX ± 0.15 . XXX ± 0.10	A	設計發行	CS. CHEN 2018/01/17	P/NO	YMU079XXXX
	⌀	TITLE	USB Type C SMT		
	SHEET 1/2	App.	Date	Chk.	Date
	SCALE 1:1	CHEN 2017/12/11	CHEN 2017/11/28	Bob	2017/10/25
譽盛精密工業股份有限公司 Yue Sheng Exact industrial CO; LTD.					